
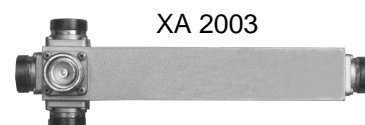
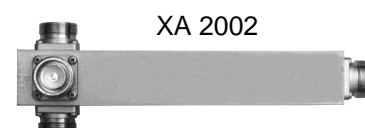


## XA 2001 XA 2002 XA 2003

### DESCRIPTION

- coupling of 2, 3, or 4 antennas
- shaping of antennas radiation patterns
- excellent matching
- high operating power
- good corrosion resistance
- easy mounting on mast

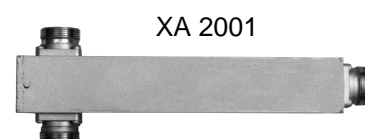

### TECHNICAL SPECIFICATION

Type		XA 2001	XA 2002	XA 2003						
Frequency range	MHz	380 ÷ 400								
Power max.	W	1000	1000	500						
VSWR		< 1.1								
Insertion loss	dB	3.0 ± <table border="1"><tr><td>0.3</td></tr><tr><td>0.1</td></tr></table>	0.3	0.1	4.8 ± <table border="1"><tr><td>0.3</td></tr><tr><td>0.1</td></tr></table>	0.3	0.1	6.0 ± <table border="1"><tr><td>0.3</td></tr><tr><td>0.1</td></tr></table>	0.3	0.1
0.3										
0.1										
0.3										
0.1										
0.3										
0.1										
Impedance	Ω	50								
Connectors		type 7/16" - female								
Weight with holder	kg	0.9	0.9	1.2						
Dimensions with holder (h × w × l)	mm	65×85×250	88×85×260	88×85×270						

#### Assembly:

Divider are possibly assembly on vertical or horizontal support  $\varnothing$  40 ÷ 110 mm.

#### Assembly accessory:

steel rustless belt 11 mm x L\*) (cm); order. num. 177-944 inclusive clip.

\*) Depends on the diameter of support.